

# ClassicBond® the original EPDM

## The Numbers Do Not Lie

• EPDM flat roof membranes have a life expectancy of at least 50 years.

• Half-century track record of performance and durability.

• Manufactured by worlds largest EPDM manufacturer

## Unrivalled

• Unmatched weatherability

• Flexibility

• Economical

• Safe – Heat free installation.

• Pressure-sensitive accessories available for virtually any penetration or detail.

## For You

• Wide variety of sheet widths – To suit each individual project and customer.

• Choice of Sheet thicknesses

• Seamless – Completely Reliable

The range of ClassicBond outlets provide the installer with a fast, effective method of detailing to flat roof outlets.

### ClassicBond 68mm Flat Roof Outlet

The pre formed roof outlet is a fast, efficient means of connecting ClassicBond EPDM roofing membrane to standard UK domestic downpipes for roofs with internal drains on domestic and small commercial flat roofs.

#### Features

Seamed with 225mm Uncured flashing tape and ClassicBond Primer  
Highly resistant to UV, structural movement and cracking  
Supplied with leaf/gravel guard  
185mm long connecting pipe with anti back up seal  
For full fitting details refer to ClassicBond Installation Guide



### ClassicBond Angled Roof Outlet

The angled roof outlet is designed to be used horizontally through parapet walls or pitched roofs this type of drain is also able to be used as a verticle type outlet in box gutter details.

#### Features

Seamed with 225mm Uncured flashing tape and ClassicBond Primer  
Highly resistant to UV, structural movement and cracking  
Supplied with leaf/gravel guard  
500mm long connecting pipe  
1m long extensions, 90° angles and shoes  
For full fitting details refer to ClassicBond Installation Guide



### ClassicBond TOP Drain Outlet

TOP Drains supplied in 110mm upto 160mm pipe diameter for larger flat roofs and commercial installations where internal roof drains are required. Top Drains give a fast, clean and effective solution to joining the ClassicBond EPDM roofing system to 110mm and larger drainage pipes. The outlet is designed to fit into a bell & spigot jointed water pipe. The outlet is joined to the membrane by using a clamping ring and compression mastic.

#### Features

333mm diameter fastening flange  
Protective cover and cutting guide  
Leaf/Gravel grate  
Drainage Capacity 492 lt/min  
For full usage details refer to the ClassicBond Installation Manual



# ClassicBond® the original EPDM


## ClassicBond 75-175mm Plastisol Steel Edge Trim & Termination Bars

For creating a finishing edge to the flat roof. An economic, but high quality finish to the roof perimeter. Available as 100mm wall flashing and 75-175mm deep perimeter trim.

The wall trims offer a economical alternative to lead and are not susceptible to theft, each trim is 3 metres long, fixed in to the wall with RB fasteners.

Perimeter trims feature a drip return on the bottom, with a range of sizes available. These are an economical method of finishing the roof perimeter.

Termination Bars are used to create a compression seal to upstands where cutting a chase or to neighboring roof systems.

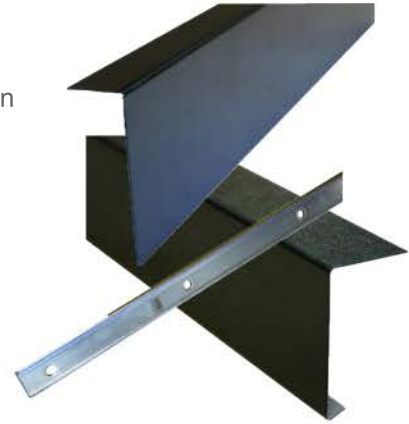

### Features

3 metre lengths for efficient installation

Clean, simple finish to the flat roofing system.

For full usage details refer to ClassicBond Installation Manual.

## PVC Perimeter Trims

An alternative to using the Plastisol Trims, the benefit of these is that they create their own seal to the roof surface, negating the need to install a timber perimeter upstand. The drip edge is a two part trim that clamps the membrane into place and creates a step into the gutter at the same time. The drip edge can also be used in conjunction with the Plastisol Edge Trims.

PVC Trims are supplied with jointing clips, poly pins & internal and external corners are available.



### Features

Fast, clean, simple finish to the flat roofing system.

For full usage details refer to ClassicBond Installation Manual.

## ClassicBond RB Trim Fasteners

ClassicBond trim fasteners, colour matched, low profile fasteners complete with an EPDM washer to create a watertight seal. Used when mechanically fixing wall trims and edge trims.

### Features

35 & 45mm lengths

Supplied with star drive bit

Low Profile, colour coded to match platisol trims



## ClassicBond Paving Support Disc

Used to support paving slabs or decking on and above the flat roof membrane. The paving supports are placed directly onto the membrane without the use of adhesives or fixings. The pads hold the decking surface 15mm above the membrane surface to allow clear flow of water. The advantage of these discs are that slabs/decking or even the supports can be removed if they get damaged or for inspection of roof outlets.

### Features

145mm diameter disc with 15mm lift

Bases manufactured with fins that position and anchor the decking or slabs

Interlocking when stacked to allow for a range of heights.

