



# **Specification and Installation Guide** for Frameless Stepped Roof Lights


**Brightside**[Skylights.co.uk](https://www.brightside-skylights.co.uk)

# The Brighter Side of Life

**Brightside Skylights®**  
Specification & Installation Guide

## Contents

<b>Features</b>	<b>03</b>
<b>Why Buy Brightside® Roof Lights?</b>	<b>04</b>
<b>Brightside® Frameless Flat Glass</b>	<b>05</b>
<b>Delivery and Installation</b>	<b>06</b>
<b>Installation Guide for Flat Roof</b>	<b>07</b>
<b>Construction for Roof Light and Upstand for Flat Roofs</b>	<b>10</b>
<b>Contact <a href="#">Back Cover</a></b>	



# Features

03

All our units are manufactured using a toughened safety glass coated outer pane, with a high class polished edge finish. Suitable for flat roofs between 5 and 15 degrees.

Manufactured to internal dimensions (structural opening size) for ease of measurement. All Double and Triple Glazed performance units feature a ten year unit warranty from the date of invoice.

## Sizes Available

Available in 16 sizes as standard in both double and triple glazed versions. Bespoke sizes available upon request.

Lengths (mm)	600	900	1000	1200	1500	1800	2000
400mm Width			✓				
600mm Width	✓	✓		✓		✓	
750mm Width			✓	✓	✓	✓	✓
1000mm Width			✓		✓		✓
1200mm Width				✓	✓		✓

\*To fit opening size.

\*\*Full warranty information, visit [www.BrightsideSkylights.co.uk](http://www.BrightsideSkylights.co.uk)

## Premium Construction

### British Made

British design and manufactured, hand crafted construction with a market leading 10 year unit seal warranty.

All our units are manufactured on site with our manufacturing partner. Each unit is Argon gas filled with thermal super spacer technology, offering both excellent thermal insulation and light transmission.

### Double Glazed U-value of 1.2 W/m<sup>2</sup>K

The Brightside® Frameless Double-Glazed unit has a 28mm profile constructed from:

- 6mm toughened safety glass with a black ceramic border.
- 16mm Argon filled cavity with black super spacer.
- 6mm toughened low e-soft coat inner.


See diagram on next page.

### Triple Glazed U-value of 0.7 W/m<sup>2</sup>K

The Brightside® Frameless Triple-Glazed unit has a 50mm profile constructed from:

- 6mm toughened safety glass with a black ceramic border.
- 16mm Argon cavity with Black super spacer.
- 6mm toughened low e-soft coat inner pane.
- 16mm Argon cavity with Black super spacer.
- 6mm toughened low e-soft coat inner.

See diagram on next page.




# Why Buy Brightside® Roof Lights?

04

## The Double or Triple Glazed Frameless Flat Glass Roof Light


### Double-Glazed Frameless Roof Light

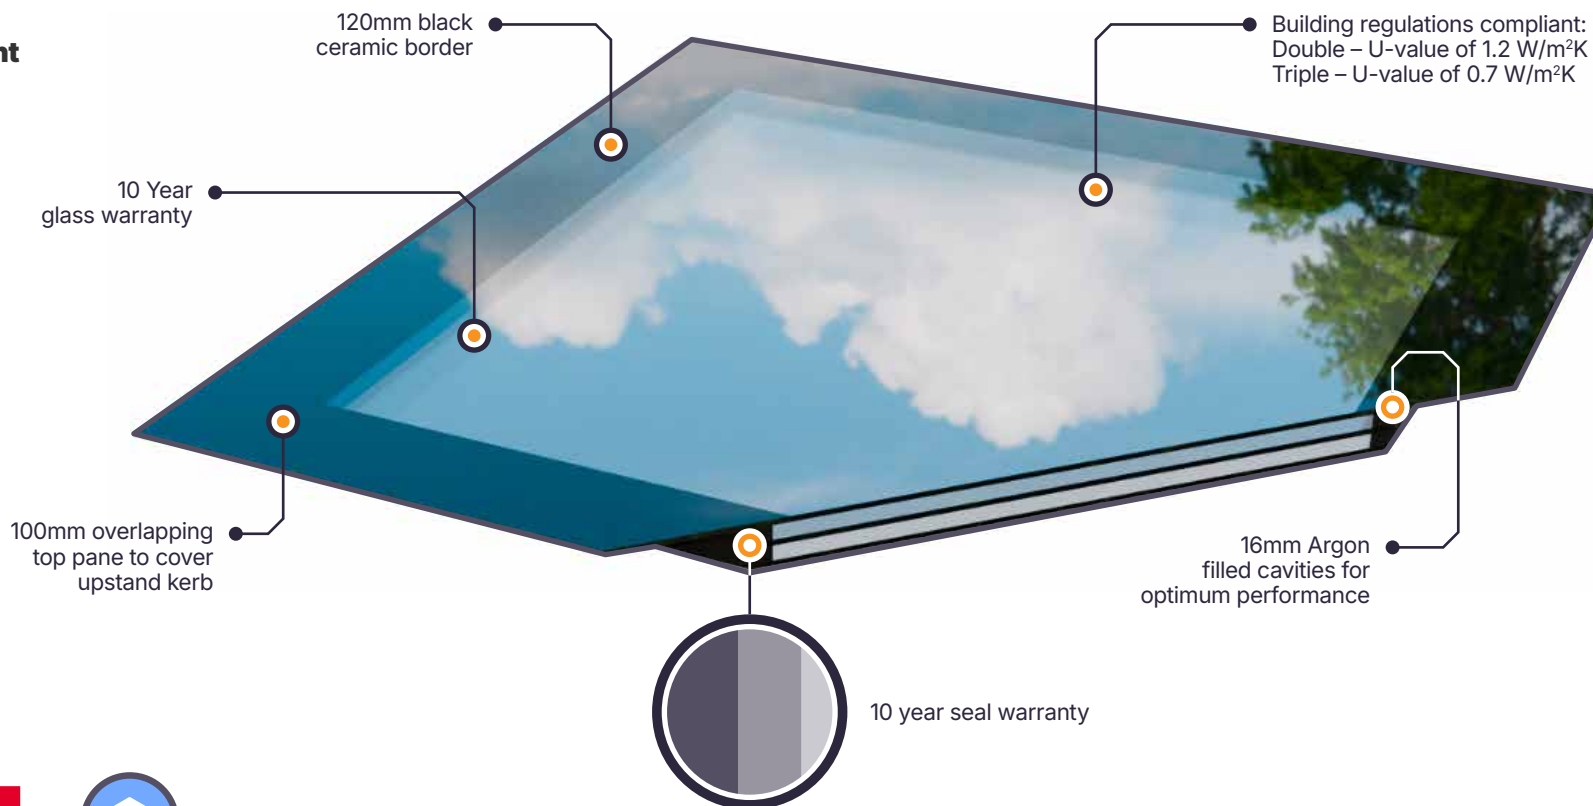

**MADE IN  
BRITAIN**




**Flat roofs** (5–15°)




# Brightside Skylights® Frameless Flat Glass


05

## Double-Glazed Frameless Roof Light

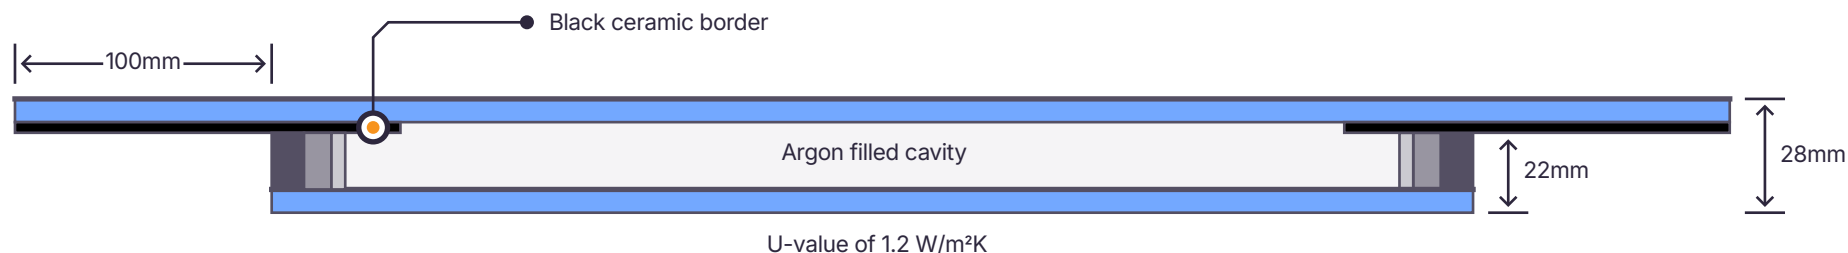

## Triple-Glazed Frameless Roof Light

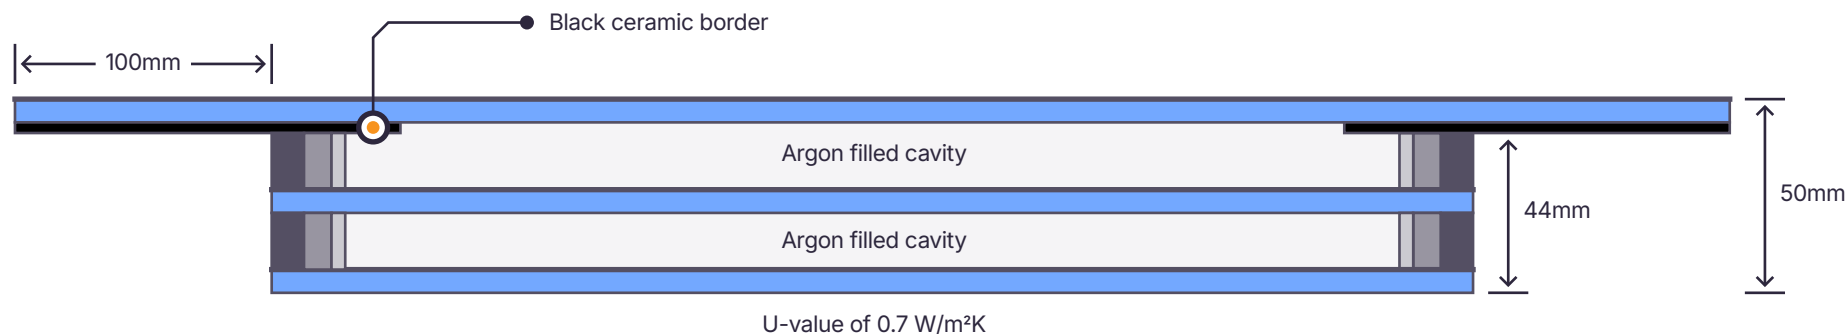



# Delivery and Installation

06

## UK Delivery

All deliveries can be made direct to site, anywhere in the UK. Using our own fleet vans, our team of experienced drivers will call you within 24 hours of placing the order and the driver will call the customer on the day of delivery when they are an hour away from site before they arrive.

For Cornwall, Devon, Scotland and some remote areas 3rd party couriers may be used.

### Lead times as follows:

#### UK Mainland:

3-5 working days

#### Scotland, Cornwall and Devon:

5-7 working days

## Fast Installation

In addition to your new Brightside® Frameless rooflight you will need:


- ▶ Silicone Adhesive: **Dowsil® 791.**
- ▶ Mastic Gun applicator.
- ▶ Glass Suction lifting handles for larger units.
- ▶ Materials and tools to construct and prepare a timber kerb.

Please take precautions when moving and lifting heavy objects and working at height. Make sure to use the correct equipment and ensure sufficient people are available to lift the roof light onto the roof and into position on the timber kerb.

## Brightside Skylights® Guide

Size (mm)	Double Glazed Weight (kg)	Triple Glazed Weight (kg)
400 x 1000	25	32
600 x 600	22	30
600 x 900	31	42
600 x 1200	40	54
600 x 1800	58	80
750 x 1000	41	57
750 x 1200	48	65
750 x 1500	59	81
750 x 1800	69	95
750 x 2000	76	106
1000 x 1000	52	72
1000 x 1500	75	105
1000 x 2000	98	138
1200 x 1200	73	102
1500 x 1500	108	152
1500 x 2000	142	202

**Please note:** Weights stated can vary. Work to a tolerance of +/- 10%.



# Installation Guide for Flat Roof

07

## Building Regulations

All building materials used and construction work carried out should be completed in accordance with Building Regulations Part L.

Part L is a set of regulations that deals with the conservation of fuel and power in buildings. Part L sets out the thermal efficiency requirements for new and existing buildings.

If in any doubt, please consult your local build control for advice before starting any work.

## Step 1 – Constructing the Timber Kerb


An upstand built on site should have a maximum U-value of  $0.35W/(m^2K)$ . The lower the U-value the better the thermal performance is.

Construct an 85mm (max) wide timber kerb for your roof light. This should be a minimum of 150mm in height at the lowest point from the finished roof level.


The internal dimensions of the structural opening should match the size of the specified Brightside® Frameless roof light. E.g. a 600mm x 600mm roof light will require a structural internal opening of 600mm x 600mm.

Your roof light needs to be a minimum of 5 degrees to allow water run-off. If your roof does not have this pitch, build the angle into your timber kerb. We recommend that you run the fall across the width or 'shorter side' of the roof light when building an angled kerb, as the fall will be less noticeable, which will improve the internal and external aesthetics.

## Timber Kerb Dimensions


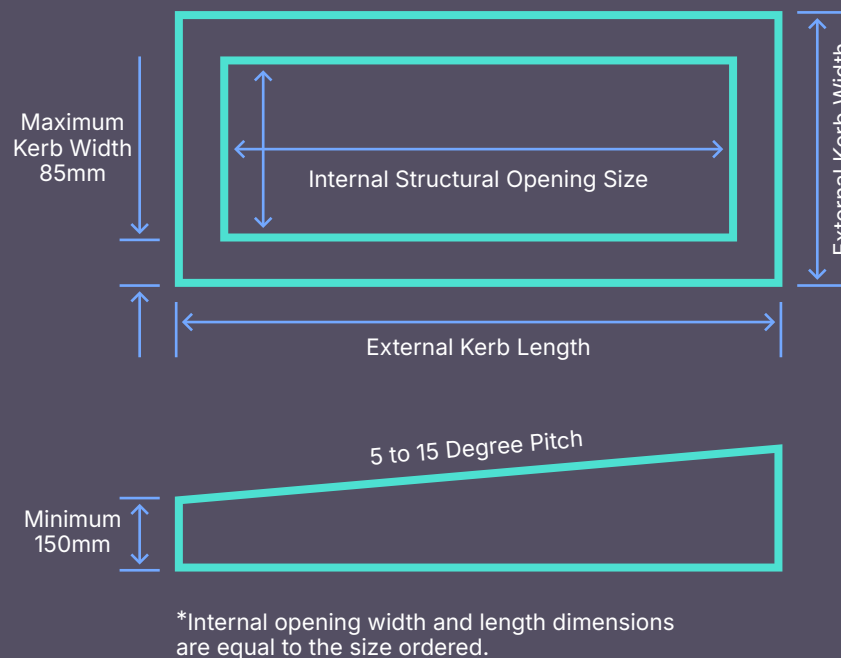


Example of a 5-degree minimum pitch: This equates to a grade of 1:11.5. E.g. a roof light with 1000mm width will require a fall of 87mm.




# Installation Guide for Flat Roof

08

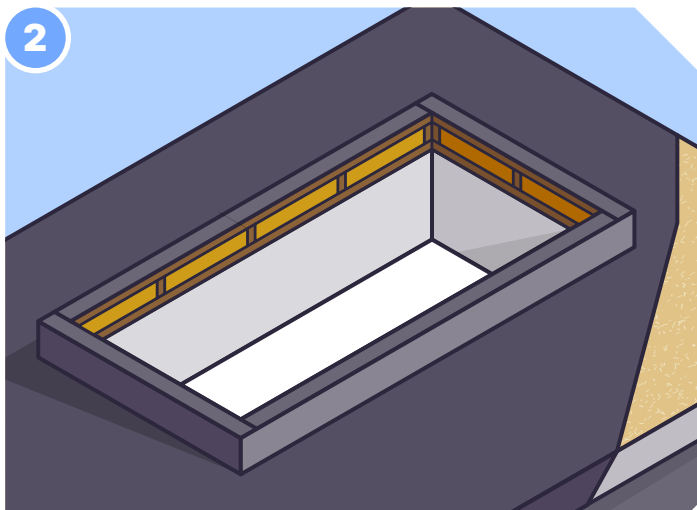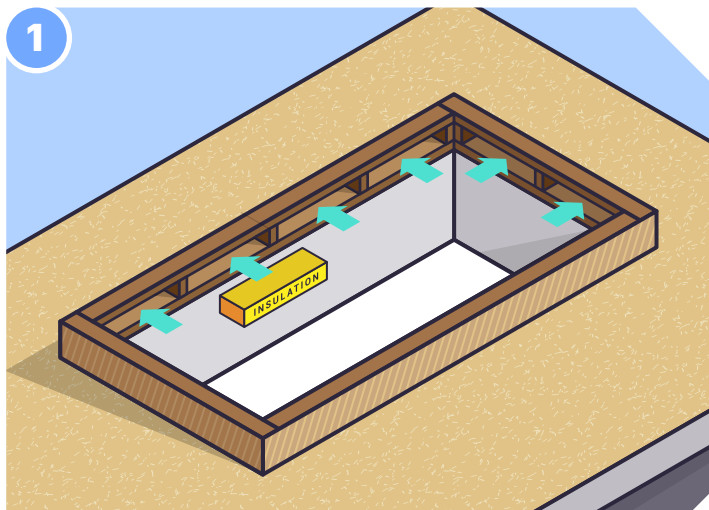

**Step 1** | Construct your insulated timber upstand as described in the previous section.

**Step 2** | Install your chosen waterproof covering making sure you waterproof both the vertical upstand and horizontal areas, across the top surface of the upstand as per the manufacturer's guidelines.

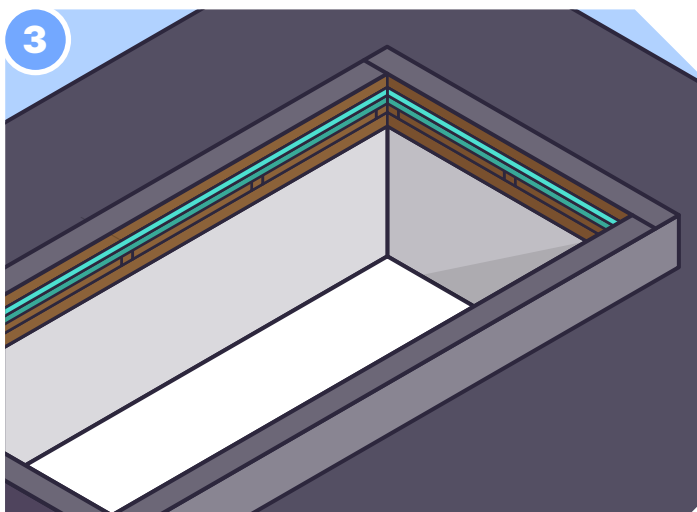


**Step 3** | Install a timber batten (minimum 25mm wide) to support the roof light on the inside of the upstand kerb. The timber batten should be installed the correct height from the top of the waterproof layer on top of the upstand. (28mm for double glazed and 44mm for triple glazed).





**Brightside**  
Skylights





# Installation Guide for Flat Roof

09

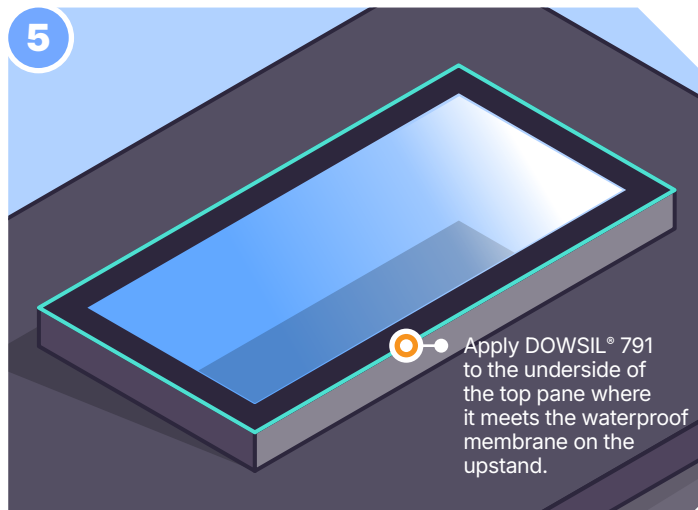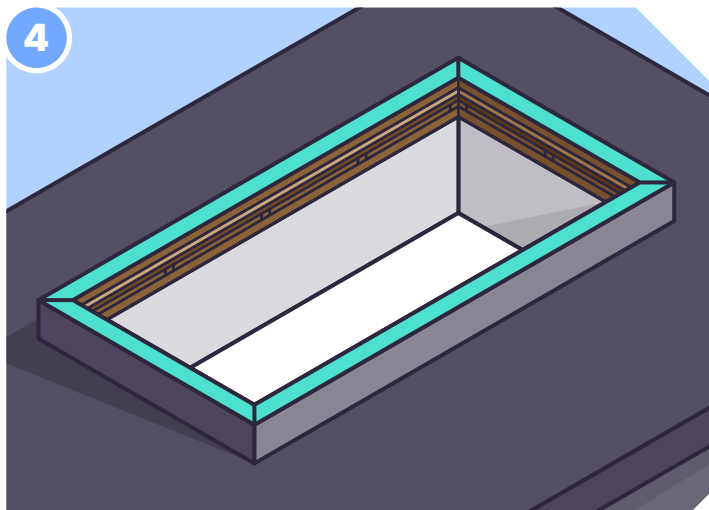

**Step 4** | Apply a bead of **DOWSIL® 791** to:


- 1) The bottom inner pane support batten.
- 2) Directly to the waterproof membrane on the top of the upstand (area marked in green).

**Step 5** | Carefully lift the Brightside® Frameless Roof Light into position. Ensure that the roof light beds equally onto the **DOWSIL® 791** Waterproof sealant.

Apply a bead of **DOWSIL® 791** Silicone to the underside of the rooflight where it meets the waterproof upstand as a secondary protection against water penetration.




**Brightside**®  
Skylights



# Construction for Roof Light and Upstand for Flat Roof

10

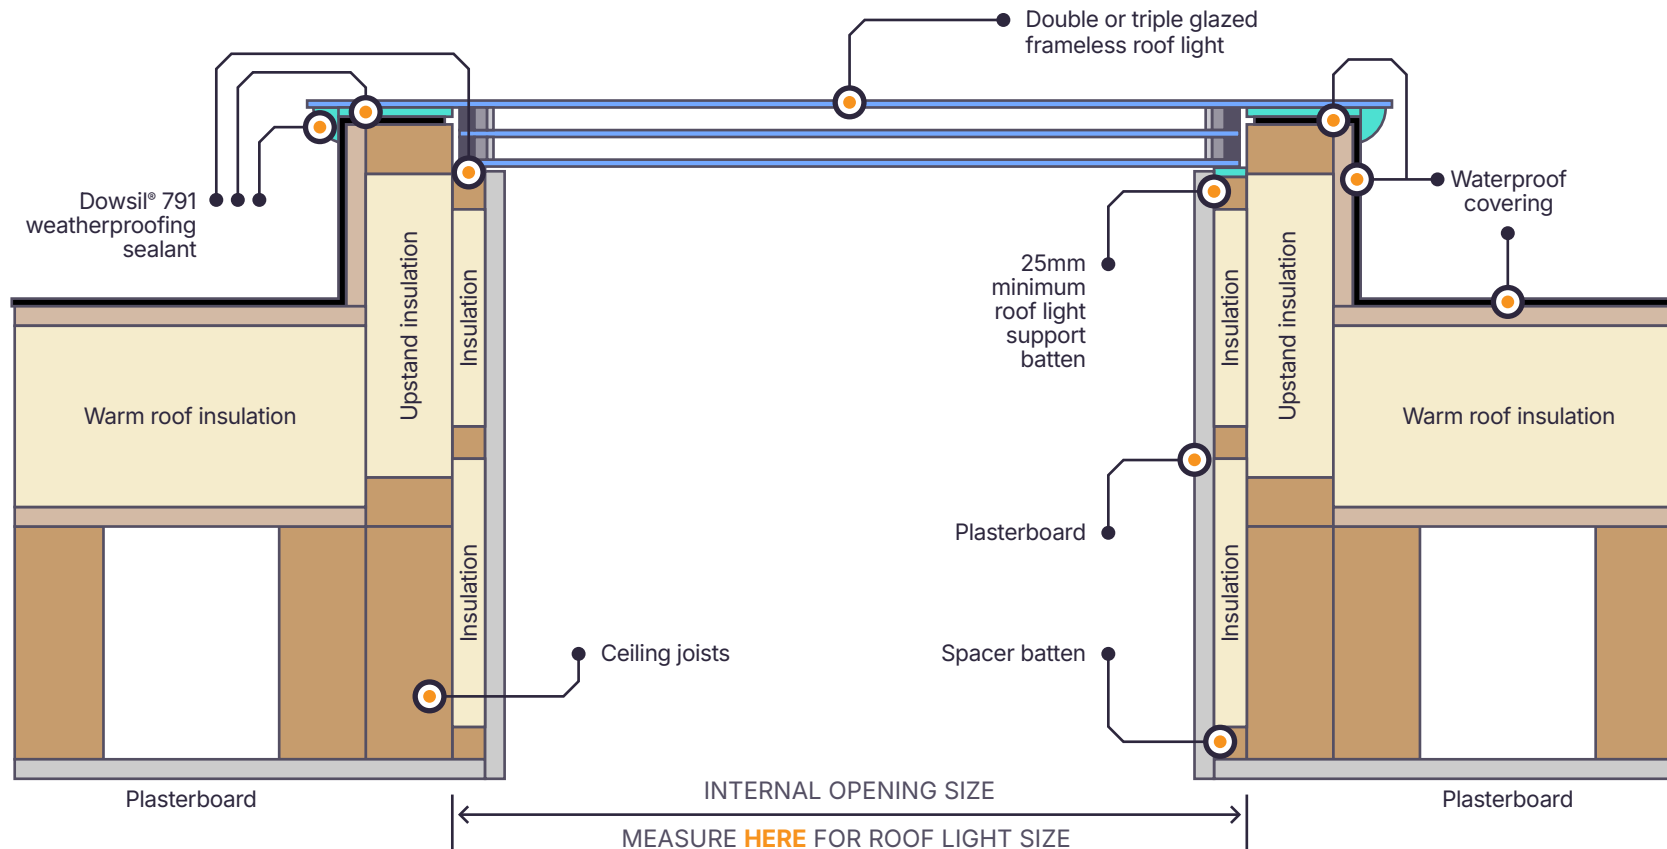



**Brightside**<sup>®</sup>  
Skylights

## Contact

**Support Service:**

**024 7759 1126**

Monday to Friday 8am – 4:30pm

**[Support@BrightsideSkylights.co.uk](mailto:Support@BrightsideSkylights.co.uk)**

**Optagon Ltd**

24 Swallow Road

Coventry

CV6 4PU

United Kingdom

**[BrightsideSkylights.co.uk](https://www.brightside Skylights.co.uk)**

Updated version – July 2025